
GENERAL NOTES

- 1. For additional information contact: Interstate Steel Inc. (432) 263-3725
- 2. The Type of SGT unit will be specified elsewhere in the plans. The numbers in the circles indicate post position. The Type of SGT unit chosen is a maintenance consideration and does not affect the systems performance. Post & Tube Options Post Only Post & Tube Options Post Only

Posts 3 thru 8 Posts 5 thru 8 Type I Posts (1) thru (2)
Type II Posts (1) thru (4)
Type III Posts (1) thru (8) None

- SGT's placed within the "minimum" 150 ft. radius, shall be installed straight. Standard rail elements may be installed within the radius, without special fabrication.
- 4. All bolts, nuts cable assemblies, cable anchors, steel tubes & bearing plates shall be galvanized.
- 5. A flare rate of 25:1 may be used over the first 50 ft. of the system to prevent the terminal head from encroaching the shoulder. The flare may be decreased or eliminated for specific installations, if directed by the Engineer.
- 6. The steel tubes shall not protrude more than 4 inches above ground. Site grading may be necessary to meet this requirement.
- 7. The steel tubes may be driven with an approved driving head. They shall not be driven with the wood post in the tube. If the steel tubes are placed in drilled holes, the backfill material must be satisfactorily compacted to prevent tube settlement.
- 8. If solid rock is encountered. See the Manufacturer's installation manual for the proper installation guidance.
- The breakaway cable assembly must be taut. A locking device, (vice grips or channel lock pliers) should be used to prevent the cable from twisting when tightening the nuts.
- 10. The wood blocks shall be "toe nailed" to the rectangular wood posts to prevent them from turning when the wood shrinks. The bearing plate on the front post shall also be "toe nailed" to prevent
- 11. For curb installations, the soil tubes and posts shall be installed at the proper ground elevation behind the curb. The posts will then require field drilling new holes to accommodate the rail to post connection bolt to maintain the proper height of the rail above the gutter pan. The excess post length above the rail will be removed if directed by the Engineer.
- 12. An object marker shall be installed on the front of the impact head as detailed on D&OM(VIA).



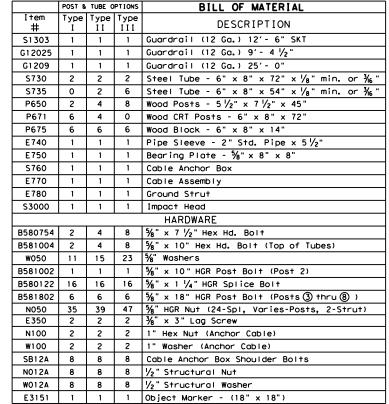

SINGLE GUARDRAIL TERMINAL (SKT-31)(WOOD POST)

SGT (8) 31-14

E: sg†83114.dgn	DN: Tx[)OT	T CK: AM DW: B		BD/VP	ск: VP	
TxDOT December 2011	CONT	SECT	JOB		HIO	HIGHWAY	
REVISIONS							
	DIST	COUNTY			SHEET NO.		

P675 2 ~ 1/8" Dia. 2 ½" Dia.

Hole %" Dia. ๋ Bottom of post

> All measurements should be taken from bottom of posts. UNIVERSAL WOOD POST

P650

PO	ST &	TUBE OPTIONS
Туре		post (1) thru (2)
Туре	ΙI	post (1) thru (4)
Туре	III	post (1) thru (8)